


# HEPA/ULPA Fan Filter Unit (FFUs) for Active and Closed RABS applications

Active and Closed RABS FFUs are engineered to meet the specifications of each project




Typical fare is 304/316L SS  
FFU with a gel seal HEPA  
filter, fan status reporting,  
test ports, networked fan  
control, and a master system  
display

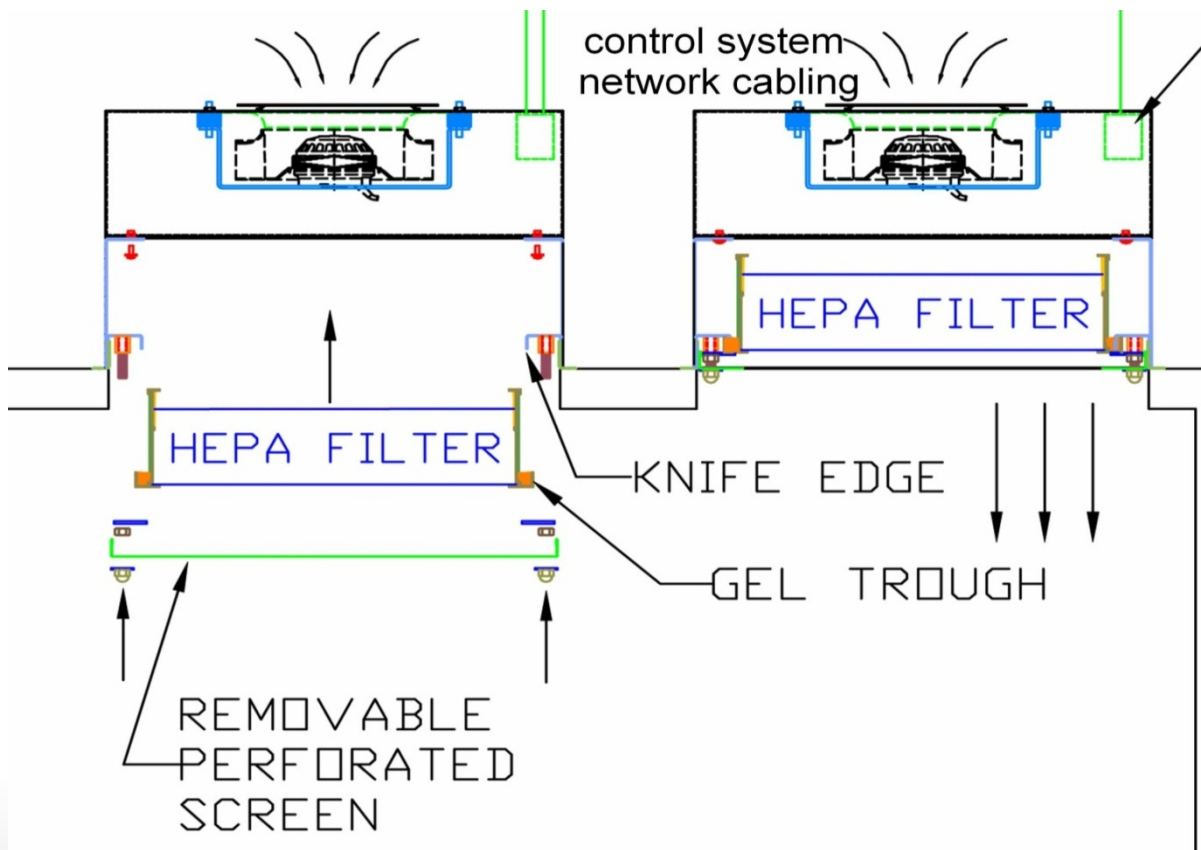

# The “Reflections” series Stainless Steel FFUs for Active and Closed RABS



Odd sizes and shapes can be accommodated, like a triangular FFU pictured below here

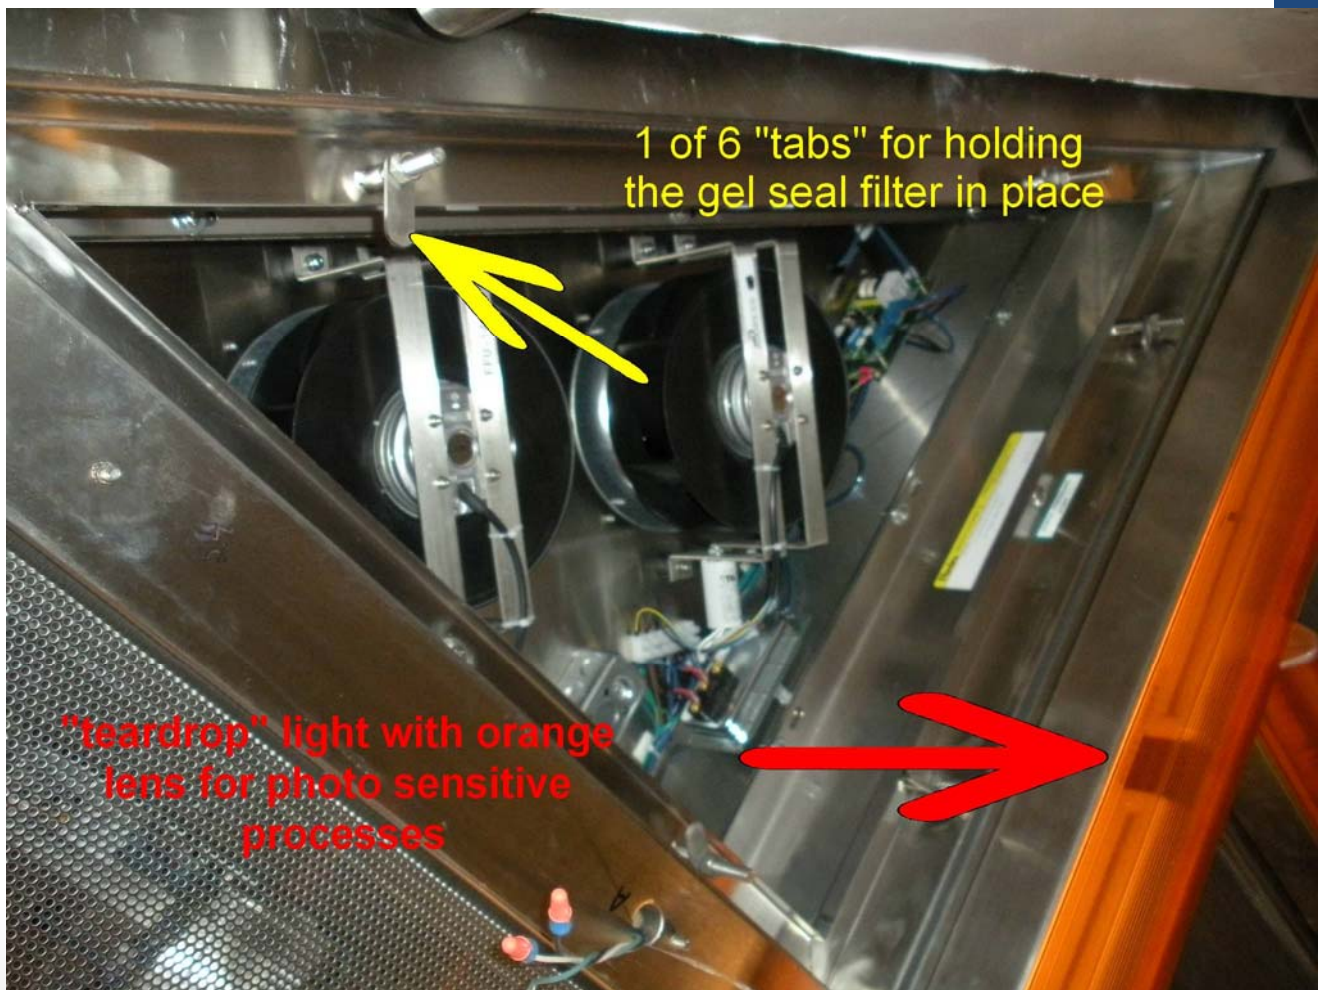

# Most RABS FFUs end up being purchased with additional features, like:

- 1) Custom or odd sizes or shapes
- 2) Alternate filter types
- 3) Alternate methods to control fan speed (see brochure on control/display systems)
- 4) Motor performance sensors
- 5) Status indicator lights and/or connectors
- 6) RPM Sensors
- 7) All Aluminum construction